



Dimensions (mm)

		L2 H2 Van		L2 H3 Van		L3 H2 Van		L3 H3 Van		L4 H3 Van
		FWD	RWD/ AWD	FWD	RWD/ AWD	FWD	RWD/ AWD	FWD	RWD/ AWD	RWD/ AWD
A	Overall length	5531	5531	5531	5531	5981	5981	5981	5981	6704
B	Overall width with mirrors	2474	2474	2474	2474	2474	2474	2474	2474	2474
	Overall width with folded back mirrors	2112	2112	2112	2112	2112	2112	2112	2112	2112
	Overall width without mirrors (SRW)	2059	2059	2059	2059	2059	2059	2059	2059	2059
	Overall width without mirrors (DRW)	–	–	–	–	–	–	–	–	2126
C	Overall height*	2413- 2533	2447- 2534	2652- 2769	2686- 2771	2411- 2530	2443- 2533	2676- 2767	2682- 2769	2715- 2778
D	Wheelbase	3300	3300	3300	3300	3750	3750	3750	3750	3750
E	Front of vehicle to front wheel centre	1023	1023	1023	1023	1023	1023	1023	1023	1023
F	Rear of vehicle to rear wheel centre	1208	1208	1208	1208	1208	1208	1208	1208	1931
G	Side door entry width	1300	1300	1300	1300	1300	1300	1300	1300	1300
H	Side load door entry height	1700	1600	1700	1600	1700	1600	1700	1600	1600
I	Rear door entry width	1565	1565	1565	1565	1565	1565	1565	1565	1565
J	Rear door entry height	1748	1648	1987	1887	1748	1648	1987	1887	1887
K	Maximum loadspace length (at floor with bulkhead)	3044	3044	3044	3044	3494	3494	3494	3494	4217
L	Maximum loadspace width	1784	1784	1784	1784	1784	1784	1784	1784	1784
M	Loadspace between wheel arches (SRW)	1392	1392	1392	1392	1392	1392	1392	1392	1392
	Loadspace between wheel arches (DRW)	–	–	–	–	–	–	–	–	1154
N	Load floor to roof	1886	1786	2125	2025	1886	1786	2125	2025	2025
O	Loading height*	482- 605	615- 706	482- 602	615- 703	478- 592	608- 695	478- 590	609- 692	608- 677
P	Maximum load volume (with bulkhead) (cu.m)	10.0	9.5	11.2	10.7	11.5	11.0	13.0	12.4	15.1
	Loadspace (with bulkhead) (VDA) (cu.m)	9.3	8.8	10.3	9.9	10.8	10.2	12.0	11.5	14.1

Van

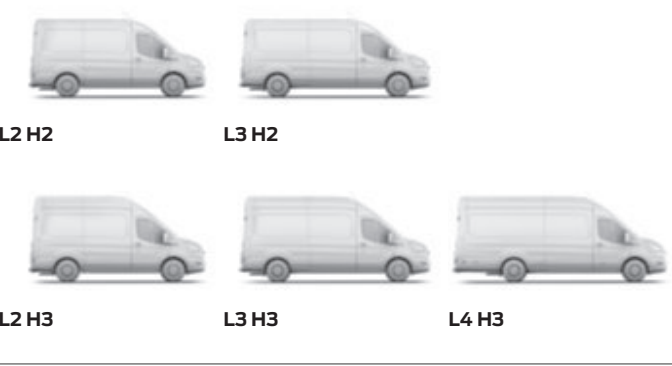

Double Cab-in-Van

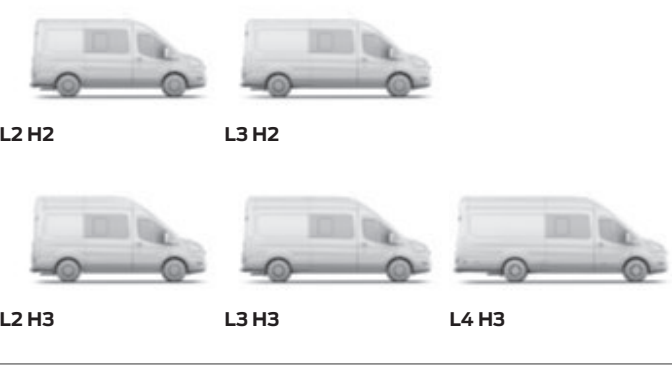

Dimensions (mm)

		L2 H2 Van		L2 H3 Van		L3 H2 Van		L3 H3 Van		L4 H3 Van
		FWD	RWD/ AWD	FWD	RWD/ AWD	FWD	RWD/ AWD	FWD	RWD/ AWD	RWD/ AWD
Double Cab-in-Van unique measurements										
G	Side door entry width	1200	1200	1200	1200	1200	1200	1200	1200	1200
P	Maximum load volume (behind bulkhead) (cu.m)	6.1	5.7	6.7	6.4	7.6	7.2	8.4	8.0	10.6
	Loadspace (behind bulkhead) (VDA) (cu.m)	5.5	5.3	6.0	5.7	7.0	6.6	7.6	7.3	9.8
Q	Maximum loadspace length	2038	2038	2038	2038	2488	2488	2488	2488	3211
R	Usable load length at 1.2 m height	1789	1789	1789	1789	2239	2239	2239	2239	2962
Turning circle (m)										
	Kerb to kerb	11.9	11.9	11.9	11.9	13.3	13.3	13.3	13.3	13.3

L2 = Medium wheelbase, **L3** = Long wheelbase, **L4** = Long wheelbase extended length. **H2** = Medium Roof, **H3** = High Roof, **FWD** = Front-wheel drive, **RWD** = Rear-wheel drive, **AWD** = All-wheel drive, **SRW** =Single rear wheels, **DRW** = Dual rear wheels. All dimensions (shown in mm) are subject to manufacturing tolerances and refer to minimum specification models and do not include additional equipment. *Height dimensions show the range from minimum to maximum of a fully laden, lowest payload vehicle to unladen highest payload vehicle. These illustrations are for guidance only. **VDA method** This is the method used by the Verband der Automobilindustrie (VDA) in Germany. A VDA figure is determined by filling the loadspace with 'litre' blocks, each measuring 200x100x50 mm. The blocks are then counted, and the numerical result is converted into cubic metres.

